



COMPENSATEURS INOX

COMPENSATEUR D'ÉCHAPPEMENT À SOUDER PN3.5




jusqu'à + 400°C

COMPOSITION

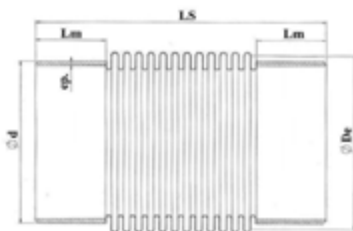

Soufflet en acier inoxydable AISI 321

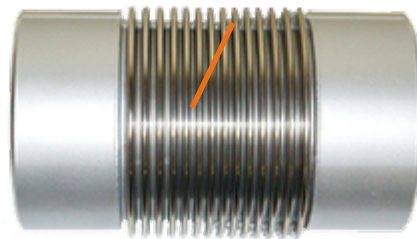

Tube et manchettes en acier

DONNÉES TECHNIQUES

Référence	DN (mm)	Mouvement axial (+/- mm)	Mouvement latéral (+/- mm)	LS (mm)	d (mm)	Ep. (mm)	De (mm)	Lm (mm)
DI-CPIES3.5.032	32	10						
DI-CPIES3.5.040	40	10	8	150	48.3	2.6		30
DI-CPIES3.5.050	50	10	8	155	60.3	2.6		30
DI-CPIES3.5.065	65	10	7	160	76.1	2.9		30
DI-CPIES3.5.080	80	25	10	180	88.9	3.2	104	37
DI-CPIES3.5.100	100	29	12	200	114.3	3.6	130	35
DI-CPIES3.5.125	125	29	9	270	139.7	4	154	70
DI-CPIES3.5.150	150	29	8	270	168.3	4.5	187	65
DI-CPIES3.5.175	175	30	6.5	280	193.7	3 (0/+2)	229	79
DI-CPIES3.5.200	200	30	6	320	219.1	3 (0/+2)	254	99
DI-CPIES3.5.225	225	30	5	320	244.5	3 (0/+2)	280	99
DI-CPIES3.5.250	250	30	4.5	320	273	3 (0/+2)	308	99
DI-CPIES3.5.300	300	32	4.7	320	323.9	3 (0/+2)	353	82
DI-CPIES3.5.350	350	35	5	350	355.6	3 (0/+2)	407	102
DI-CPIES3.5.350L	350	50						
DI-CPIES3.5.400	400	35	4.5	350	406.4	3 (0/+2)	457	102
DI-CPIES3.5.400L	400	50						
DI-CPIES3.5.450	450	25						
DI-CPIES3.5.450L	450	50						
DI-CPIES3.5.500	500	25						
DI-CPIES3.5.500L	500	50						

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)