


COUPLEURS STANDARDS

COUPLEURS FACE-PLANE ANTI-POLLUTION FEMELLE FG



DONNÉES TECHNIQUES

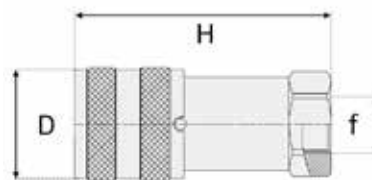

Référence	Désignation	ø f		ø D	H	Pression maxi	Débit maxi
		mm	pouce	mm	mm	bar	L/mn
CAPF000406	CAPF 1/4 / DN06 - ISO 16028	11,44	1/4"	28	60	400	23
CAPF000606	CAPF 3/8 / DN06 SP - ISO 16028	14,95	3/8"	28	60	400	25
CAPF000610	CAPF 3/8 / DN10 - ISO 16028	14,95	3/8"	32	68	350	45
CAPF000810	CAPF 1/2 / DN10 - ISO 16028	18,63	1/2"	32	68	350	48
CAPF000812	CAPF 1/2 / DN12 SP - ISO 16028	18,63	1/2"	38	82,5	350	95
CAPF000816	CAPF 1/2 / DN16 SP - ISO 16028	18,63	1/2"	41,8	82	350	150
CAPF001212	CAPF 3/4 / DN12 - ISO 16028	24,12	3/4"	38	82,5	350	95
CAPF001216	CAPF 3/4 / DN16 SP - ISO 16028	24,12	3/4"	41,8	82	350	150
CAPF001220	CAPF 3/4 / DN20 SP - ISO 16028	24,12	3/4"	46,5	101	350	200
CAPF001620	CAPF 1" / DN20 - ISO 16028	30,29	1"	46,5	101	350	200
CAPF001625	CAPF 1" / DN25 SP - ISO 16028	30,29	1"	55	105	350	280
CAPF002025	CAPF 1"1/4 / DN25 - ISO 16028	38,95	1 1/4"	55	105	350	280
CAPF002430	CAPF 1"1/2 / DN30 - ISO 16028	44,84	1 1/2"	80	132,5	200	379
CAPF003245	CAPF 2" / DN45 - ISO 16028	56,65	2"	100	165	150	757

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)