


ISO FLEX

COUPLEURS STANDARDS

COUPLEURS FACE-PLANE ANTI-POLLUTION FEMELLE FG / ANTI-POLLUTION 400 BAR



DONNÉES TECHNIQUES

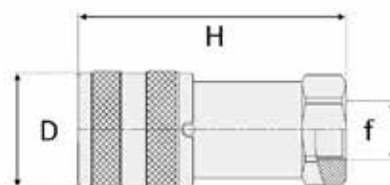

Référence	Désignation	ø f		ø D (mm)	ø H (mm)
		inch	mm		
CAPF400205	CAPF 1/8 / DN05 - 720B-3,6L/MN	1/8'	8,56	20	46
CAPF400406	CAPF 1/4 / DN06 - ISO 16028 - 500B-12L/MN	1/4'	11,44	28	60
CAPF400610	CAPF 3/8 / DN10 - ISO 16028 - 400B-23L/MN	3/8'	14,95	32	68
CAPF400810	CAPF 1/2 / DN10 - ISO 16028 - 400B-23L/MN	1/2'	18,63	32	68
CAPF400812	CAPF 1/2 / DN12 - ISO 16028 - 400B-45L/MN	1/2'	18,63	38	82,5
CAPF401212	CAPF 3/4 / DN12 - ISO 16028 - 400B-45L/MN	3/4'	24,12	38	82,5
CAPF401216	CAPF 3/4 / DN16 - ISO 16028 - 400B-74L/MN	3/4'	24,12	41,8	82
CAPF401220	CAPF 3/4 / DN20 - ISO 16028 - 400B-100L/MN	3/4'	24,12	46,5	101
CAPF401620	CAPF 1" / DN20 - ISO 16028 - 400B-100L/MN	1"	30,29	46,5	101
CAPF401625	CAPF 1" / DN25 - ISO 16028 - 300B-189L/MN	1"	30,29	55	105

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)