

# EMBOUTS INTERLOCK


## ORFS

### EMBOUT FEMELLE DROIT



#### DONNÉES TECHNIQUES

Filetage UNF - joint facial

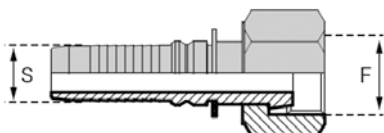

Référence	Désignation	S ( int. tuyaux)			Dimensions			
		module	inch	mm	filetage	F/p	pas	D.I
IFORF01010	IN 16 FORF 1"	10	5/8"	15,9	1"	14	1,814	23,45
IFORF01012	IN 16 FORFS 1*3/16	10	5/8"	15,9	1*3/16	12	2,116	27,87
IFORF01210	IN 19 FORF 1"	12	3/4"	19	1"	14	1,814	23,45
IFORF01212	IN 19 FORFS 1*3/16	12	3/4"	19	1*3/16	12	2,116	27,87
IFORF01216	IN 19 FORFS 1*7/16	12	3/4"	19	1*7/16	12	2,116	34,22
IFORF01612	IN 25 FORFS 1*3/16	16	1"	25,4	1*3/16	12	2,116	27,87
IFORF01616	IN 25 FORFS 1*7/16	16	1"	25,4	1*7/16	12	2,116	34,22
IFORF01620	IN 25 FORFS 1*11/16	16	1"	25,4	1*11/16	12	2,116	40,57
IFORF02020	IN 32 FORFS 1*11/16	20	1*1/4	31,8	1*11/16	12	2,116	40,57
IFORF02024	IN 32 FORFS 2"	20	1*1/4	31,8	2"	12	2,116	48,51

#### PRODUITS SIMILAIRES

Cet embout existe également en mâle droit ou femelle coudé 45°, 90° et 90° courbe haute.

[www.isoflex.fr](http://www.isoflex.fr)

Tel : +33(0)2 41 39 98 98 - [contact@isoflex.fr](mailto:contact@isoflex.fr)

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)