


EMBOUTS INTERLOCK ORFS

EMBOUT FEMELLE COUDE 45°



DONNÉES TECHNIQUES

Filetage UNF - joint facial

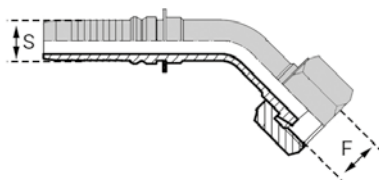

Référence	Désignation	S (int. tuyaux)			Dimensions			
		module	inch	mm	filetage	F/p	pas	D.I
IFORF41010	IN 16 FORF 1" 45	10	5/8"	15,9	1"	14	1,814	23,45
IFORF41012	IN 16 FORFS 1"3/16 45	10	5/8"	15,9	1"3/16	12	2,116	27,87
IFORF41210	IN 19 FORF 1" 45	12	3/4"	19	1"	14	1,814	23,45
IFORF41212	IN 19 FORFS 1"3/16 45	12	3/4"	19	1"3/16	12	2,116	27,87
IFORF41216	IN 19 FORFS 1"7/16 45	12	3/4"	19	1"7/16	12	2,116	34,22
IFORF41612	IN 25 FORFS 1"3/16 45	16	1"	25,4	1"3/16	12	2,116	27,87
IFORF41616	IN 25 FORFS 1"7/16 45	16	1"	25,4	1"7/16	12	2,116	34,22
IFORF41620	IN 25 FORFS 1"11/16 45	16	1"	25,4	1"11/16	12	2,116	40,57
IFORF42020	IN 32 FORFS 1"11/16 45	20	1"1/4	31,8	1"11/16	12	2,116	40,57
IFORF42024	IN 32 FORFS 2" 45	20	1"1/4	31,8	2"	12	2,116	48,51
IFORF42424	IN 38 FORFS 2" 45	24	1"1/2	38,1	2"	12	2,116	48,51

PRODUITS SIMILAIRES

Cet embout existe également en mâle droit et femelle droit ou coudé 90° et 90° courbe haute.

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)